

### S5Q-PA, S8Q-PA, VH200, VH410 & VH410M

## **Ultraviolet Water Disinfection Systems** from VIQUA

The quality of drinking water can change with time and become contaminated with harmful bacteria. The VIQUA **HOME family** of compact UV disinfection systems provide a **reliable**, **economical**, and **chemical-free** way to safeguard drinking water in any residential application. VIQUA's range of products have been designed and tested to ensure quality drinking water is at everyone's finger tips.

Regardless of your need, there is a VIQUA system to suit your requirements. VIQUA offers systems that range in flow rates from just 6 GPM for a small home or cottage, up to 18 GPM for a larger home or small business.

# Features of VIQUA UV water disinfection systems up para el futuro

- Equipped to inactivate chlorine-resistant parasites such as **Cryptosporidium** and **Giardia**, harmful bacteria like **E.Coli**, and viruses not visible to the naked eye.
- Specially designed and tested Sterilume<sup>™</sup>-EX and -HO lamps provide **consistent and reliable** ultraviolet output over the entire life of the lamp (9000 hours) to ensure continuous purification.
- The system is simple to maintain and service allowing for easy lamp replacement.
- Built with a **durable stainless steel chamber** to prolong life and eliminate ultraviolet light degradation.

- The controller visually displays the remaining lamp life and will go into alarm if the lamp fails. Monitored systems are equipped with a UV sensor which provides a continuous readout of UV intensity.
- The controller has a sealed case to prevent damage from accidental water intrusion and is fully CSA and CE compliant.
- Monitored systems allow for the installation of an optional solenoid valve which will stop the flow of water through the chamber should the UV performance fall below a safe level.


#### **Specifications**

|                                      | MOH  | Vicity                                      |                                     |                                     |                                    |
|--------------------------------------|--|---|-------------------------------------|-------------------------------------|------------------------------------|
| MODEL                                | S5Q-PA                                       | S8Q-PA                                      | VH200                               | VH410                               | VH410M                             |
| FLOW RATES                           |  |   |                                     |                                     |                                    |
| US Public Health (16 mJ/cm²)         | 11 GPM (42 lpm)<br>(2.5 m <sup>3</sup> /hr)  | 19 GPM (72 lpm)<br>(4.3 m³/hr)              | 16 GPM (60 lpm)<br>(3.6 m³/hr)      | 34 GPM (130 lpm)<br>(7.8 m³/hr)     | 34 GPM (130 lpm)<br>(7.8 m³/hr)    |
| VIQUA Standard (30 mJ/cm²)           | 6 GPM (23 lpm)<br>(1.4 m³/hr)                | 10 GPM (38 lpm)<br>(2.3 m <sup>3</sup> /hr) | 9 GPM (34 lpm)<br>(2.0 m³/hr)       | 18 GPM (70 lpm)<br>(4.2 m³/hr)      | 18 GPM (70 lpm)<br>(4.2 m³/hr)     |
| NSF/EPA (40 mJ/cm²)                  | 4.5 GPM (17 lpm)<br>(1.0 m <sup>3</sup> /hr) | 8 GPM (29 lpm)<br>(1.8 m <sup>3</sup> /hr)  | 7 GPM (26 lpm)<br>(1.6 m³/hr)       | 14 GPM (54 lpm)<br>(3.3 m³/hr)      | 14 GPM (54 lpm)<br>(3.3 m³/hr)     |
| DIMENSIONS                           |  |   |                                     |                                     |                                    |
| Dimensions                           | 22" x 2.5"<br>(56.1 cm x 6.5 cm)             | 35.5" x 2.5"<br>(90.4 cm x 6.5 cm)          | 17.75" x 3.5"<br>(45 cm x 8.9 cm)   | 23.5" × 3.5"<br>(59.6 cm × 8.9 cm)  | 23.5" x 3.5"<br>(59.6 cm x 8.9 cm) |
| Inlet/Outlet Port Size               | 3/4" MNPT (/2B - BSP)                        | 3/4" MNPT (/2B - BSP)                       | 3/4" - 1" MNPT COMBO<br>(/2B - BSP) | 3/4" - 1" MNPT COMBO<br>(/2B - BSP) | 3/4" - 1" COMBO NPT<br>(/2B - BSP) |
| Shipping Weight                      | 8 lbs (3.6 kg)                               | 11 lbs (5 kg)                               | 12 lbs (5.4 kg)                     | 17 lbs (7.7 kg)                     | 17 lbs (7.7 kg)                    |
| ELECTRICAL                           |  |   |                                     |                                     |                                    |
| Voltage                              | 100-240V / 50-60 Hz                          | 100-240V / 50-60 Hz                         | 100-240V / 50-60 Hz                 | 100-240V / 50-60 Hz                 | 100-240V / 50-60 Hz                |
| Power Consumption                    | 30 W   | 46 W  | 35 W                                | 60 W                                | 60 W                               |
| Maximum Operating Pressure           | 125 psi (8.62 bar)                           | 125 psi (8.62 bar)                          | 125 psi (8.62 bar)                  | 125 psi (8.62 bar)                  | 125 psi (8.62 bar)                 |
| Ambient Water Temperature            | 2-40°C (36-104°F)                            | 2-40°C (36-104°F)                           | 2-40°C (36-104°F)                   | 2-40°C (36-104°F)                   | 2-40°C (36-104°F)                  |
| FEATURES                             |  |   |                                     |                                     |                                    |
| Visual "Power On"                    | YES  | YES   | YES                                 | YES                                 | YES                                |
| Chamber Material                     | 304 SS                                       | 304 SS                                      | 304 SS                              | 304 SS                              | 304 SS                             |
| Visual Lamp Life Remaining           | YES  | YES   | YES                                 | YES                                 | YES                                |
| Audible Lamp Life Failure            | YES  | YES   | YES                                 | YES                                 | YES                                |
| Audible Lamp Replacement<br>Reminder | YES  | YES   | YES                                 | YES                                 | YES                                |
| UV Sensor                            | NO   | NO  | NO                                  | NO                                  | YES                                |

#### **Replacement Parts**

| S463RL – UV lamp for S5Q-PA         | <b>QS-410</b> – quartz sleeve for VH410 and VH410M                |  |  |
|-------------------------------------|---|--|--|
| S810RL – UV lamp for S8Q-PA         | 410867 – o-ring for quartz sleeves                                |  |  |
| S200RL – UV lamp for VH200          | RN-001 – retaining nut for all systems                            |  |  |
| S410RL – UV lamp for VH410 & VH410M | <b>BA-ICE-S</b> – electronic ICE controller for S5Q-PA and S8Q-PA |  |  |
| QS-463 – quartz sleeve for S5Q-PA   | <b>BA-ICE-CL</b> – electronic ICE controller for VH200, VH410     |  |  |
| QS-810 – quartz sleeve for S8Q-PA   | <b>BA-ICE-CM</b> – electronic ICE controller<br>VH410M            |  |  |
| QS-001 – quartz sleeve for VH200    | 1   |  |  |
|                                     |   |  |  |

#### Aqua para el futuro

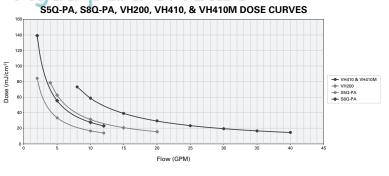



425 Clair Rd. W, Guelph, Ontario, Canada N1L 1R1 t. 1.519.763.1032 • f. 1.519.763.5069 • tf. 1.800.265.7246 (US/CAN) • t. +31.73.747.0144 (EUR) info@viqua.com • www.viqua.com LIT-520329-R\_RevB © 2017 VIQUA - a Division of Trojan Technologies Group ULC

